

Coldecatti

Customization Catalogue

View customization options for tub style, material, and finish.



Coldecati

Basin Style

Select the silhouette that fits your space and desired occupancy.



Vessel
1-person



Hyperpod
1-person



Dual Hyperpods
2-person




Dualpod 2
2-person



Basin 4
4-person



Bowl
4-person

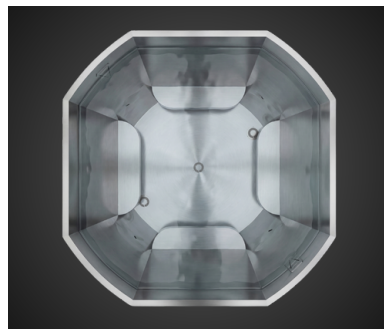

Custom
1+



Exterior Colorways

Customize your stainless steel color.

Colderatti stainless steel systems come in natural brushed stainless steel, but we offer custom exterior colors using an ultra-hard PVD metallic finishing process to match your brand's aesthetic.


- **Standard PVD Colors – \$1,200**



Natural



Cinnamon



Chocolate




Aged Copper



Olive Oil Gold



Wine Red



Royal Blue



Graphite Black

- **Special PVD Colors – \$2,200**

Finishes outside of our standard selection, and custom color-matching

While PVD technology offers a diverse spectrum, the palette is governed by specific chemical and physical constraints. For requests outside our standard library, we can identify the closest achievable match, provided a reference. To ensure complete confidence, we provide visual samples of the best-matched finish for approval prior to production.

Add Your Brand Logo

Customize your setup and add your brand logo on a precision-etched 7" wide stainless steel plaque.

- **Stainless Steel Logo Plaque – \$150**



Hyperchiller Electrical Option


Select your Hyperchiller electrical configuration.

- **Standard Commercial (120V) – Included**

Efficient, high-performance power. 120V / 20A / 1.5HP engine.

- **Performance Commercial (240V) – \$1,000**

High voltage, ultra-speed power for high-traffic use. 33% faster. 240V / 20A / 2.0HP engine.

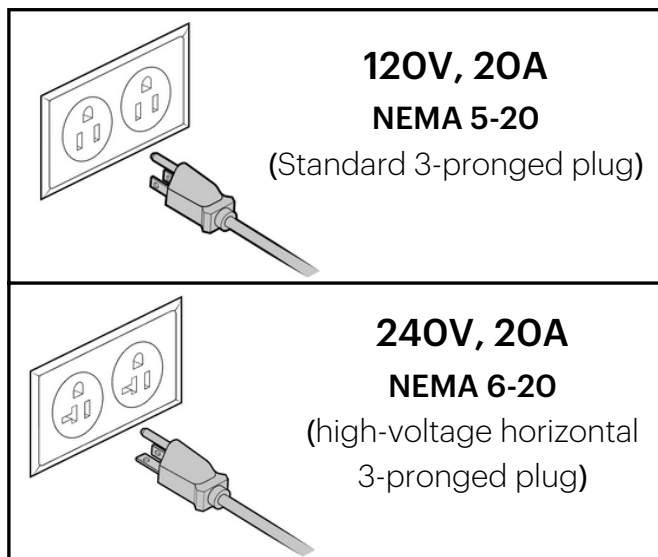




Remote Chiller Placement

Place your chiller remotely from the machine in a nearby maintenance closet, utility room, or equipment pad.

- **Remote: Up to 40 feet Run Length – \$400/line**

Depending on your floorplan and desired run length, we can provide you with custom-length insulated water lines.

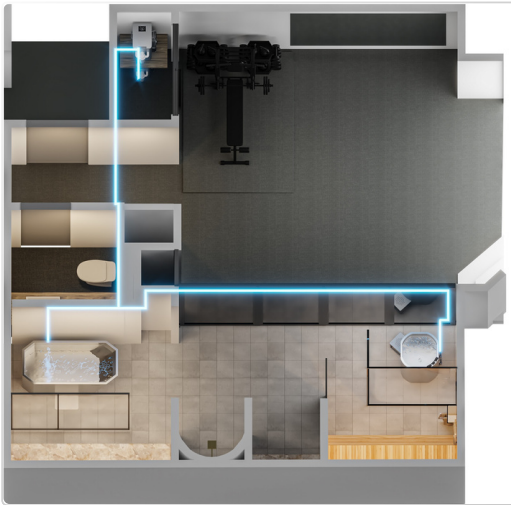

- **Adjacent: 5 feet – Included**

Standard package includes 5-foot insulated flexible lines, designed for adjacent chiller placement.





Install Configuration

Our Pro systems are designed for versatile installation options.

Plumbing Interface:

- **No-Plumbing**

No plumbing is needed with our Pro systems. Fill and drain with a standard hose. An optional submersible pump enables efficient long-range drainage.

- **Integrated Plumbing**

For a fully integrated setup (like a bathtub), use the dedicated FILL and DRAIN hydraulic connections on the tub and plumb directly into site water supply and drainage. You can also fill with wall or ceiling-mounted fixtures.

Placement:

- **Freestanding Install (Above-Ground)**

Standalone, above-ground installation. Place in your wellness space with minimal site prep.

- **Recessed Install (In-Ground)**

The system can be fully integrated and built-in to the tile/flooring. The basin is fully insulated and structurally reinforced for permanent built-in tile or stone surrounds. The chiller engine can be placed remotely with conduits running the chiller to the tub.

