



Cold & Hot
32°F – 104°F

Hyperchiller™
superfast cooling

Automatic water
purification

Smartphone
controlled

Hyperpod Pro



Full body
submersion

1 adult, 6 foot 10in

Small footprint

316L stainless
steel

A masterpiece of recovery technology.

Discover the Colderatti Hyperpod Pro

Commercial Ready

- Commercial-grade cooling, filtration, and UL-listed components for continuous, high-demand use.
- VGB/ANSI 2017 main suction drain.
- Surface skimmer.
- 316L stainless steel construction.
- Optional: Automatic sanitizer dosing/monitoring system.

Temperature Range: 32°F – 104°F

- Set the plunge to your ideal temp.
- Experience cold or heat immersion.
- Generates ice glaciers at 32°F.

Hyperchiller Superfast Cooling

- Cools at -17°F per hour, or 70°F to 50°F in 70 minutes.
- 4-8X faster than the latest commercial-grade systems.
- Smooth, silent, and energy-efficient.
- Use the onboard control panel or your smartphone to adjust temperature.

Flexible Chiller Placement

- Place the chiller in a separate location from the tub and control wirelessly via smartphone.
- Remote locate up to 40 feet away, with 15 feet of vertical lift.

Upright Full Water Immersion

- Fully submerge your body with ease in the spacious vertical tub.
- The upright design engages your body's natural buoyancy to create a weightless zero-gravity experience.

Automatic Water Purification

- 4-stage commercial-grade system keeps your water clean & crystal clear using two particle filters, aeration, and a high-output ozone generator.
- Creates an oxygen-rich, bacteria resistant environment for hands-free pure water.
- Dual-action filtration delivers full water column purity – a surface skimmer eliminates oils and floating debris, while floor intakes remove sunken particles.
- 24/7 continuous filtration.

Support, Service, and Financing

- 7-year warranty on structure, 2 year on components. Nationwide service.
- White glove delivery & setup available.
- Live U.S. based technical support.
- Home financing and commercial equipment lending with lowest rates available.

Specifications

Total Footprint with Chiller & Clearance	78" x 35" x 44" (LWH)
Tub Dimensions:	31" x 31" x 43.7" (LWH)
Capacity: Water Capacity: Daily Bather Load:	1 adult, up to 6 foot 10 in 93 gallons 70 bathers/day
Filtration	2.5x10", 20 Micron, NSF/ANSI
Water Turnover Rate	12 minutes
Electrical Requirements	120V 20-amp dedicated circuit
Weight Dry/Full	175lbs/945lbs (tub) 120lbs (Hyperchiller)
Materials	316L stainless steel.
Chiller/Heater Power	1.5HP chiller, 4.4kw heater

Fast and Simple Maintenance:

- Quickly change filters, drain, and refill the tub.
- No assembly required, just connect water lines and get started.


Sales: (972) 213-1210

Email: welcome@colderatti.com

colderatti.com

Get in touch


2026 Colderatti. All Rights Reserved

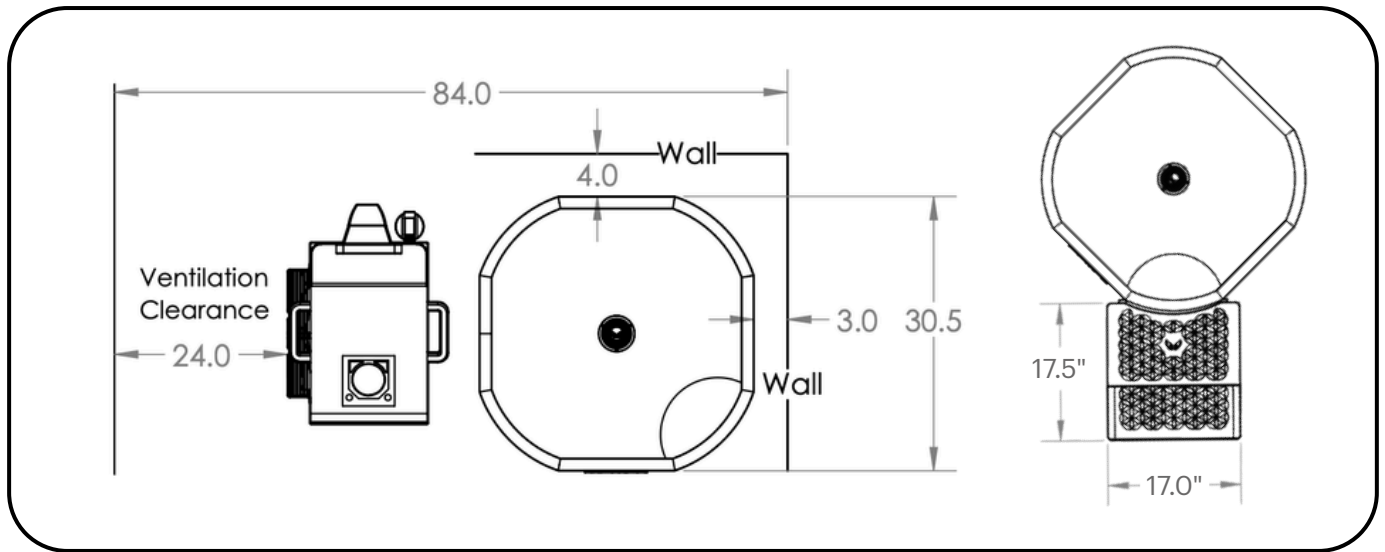


Details:

- Designed and Engineered by Colderatti in the USA.
- Aerospace grade 316L stainless steel.
- Commercial 1.5HP Hyperchiller engine.
- Cold/Hot (32-104°F) temperature control.
- High output ozone generator.
- Remote controlled.
- Freestanding design, fully portable.
- Fits through standard doorway.
- Suitable for in-ground or deck-surround installation.
- No plumbing required (fill/drain with standard hose).
- 120V / 20A GFCI protected. Requires 20A dedicated circuit.
- Safety: UL, NSF, CE, and ETL (Intertek) certified.

Hydraulic Connections:

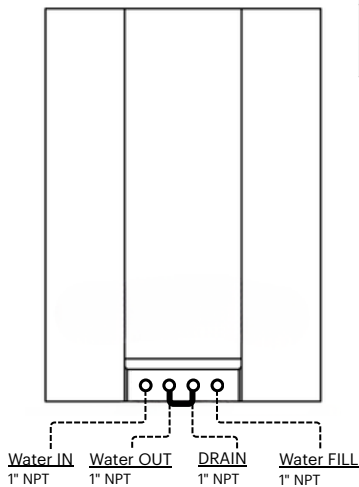

Water OUT	→	To Hyperchiller INLET
Water IN	→	To Hyperchiller OUTLET
DRAIN	→	Optional DRAIN outlet. Allows routing to nearby floor drain or plumbing connection to sanitary septic line.
FILL	→	Optional FILL valve. Allows connection to water source.

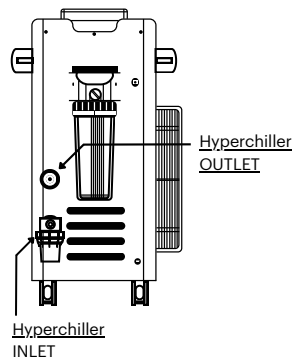

What's included

Hyperpod with Hyperchiller	Included
Insulated Press-Fit Cover	Included
Room of Choice Delivery	Included
Colderatti Care+ 7-Year Limited Warranty	Included
Stainless Steel Step Stool	Add-On
Water Care Kit - 7X filters, water clarifier	Add-On
Stainless Steel Care Kit - Clean, Polish, Protect	Add-On



Integrated skimmer
for continual cleanliness

Precise temperature control
and automated purification

Deep basin for full-
body immersion

Floor intake/main drain

Interior step functions
as a deep seat

Exterior step for easy
entry/exit

